SkyTechSport

Racer Max


Wiring Diagram

European Union

POWER SUPPLY

220–240V, Single-Phase Main Feed

Phase + neutral + PE · Custom model, additional fee applies

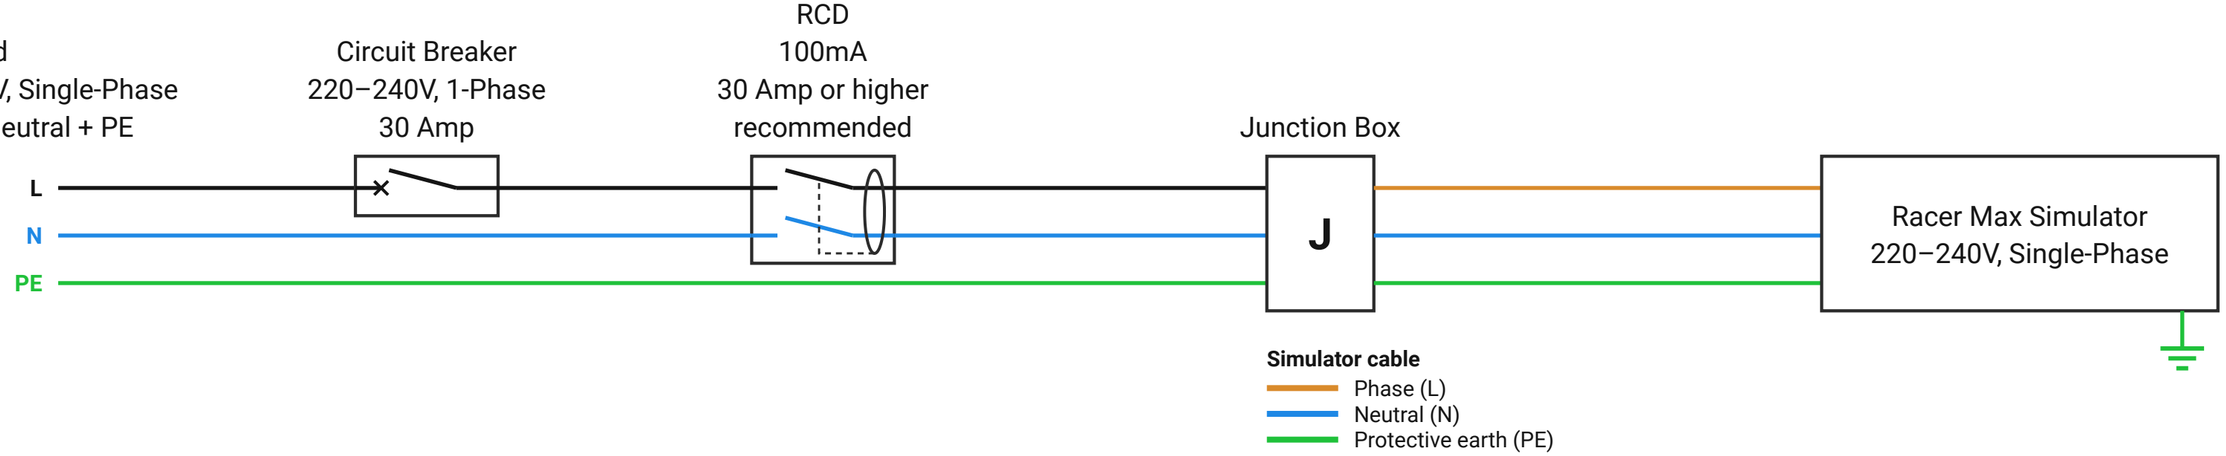

Customer provides
Main Feed, Circuit Breaker, RCD and Junction Box

Provided with the simulator
Power cable and simulator

Notes

1. An RCD (100 mA) is recommended, rated 30 A or higher to match the circuit breaker. It is installed in your distribution board and is provided by the customer. Requirements vary by location: check with your licensed electrician and follow your local electrical code.
2. You provide a junction box. Instead of a junction box, a disconnect can be installed, per local code.