SkyTechSport

Racer Max


Wiring Diagram

United States & Canada

POWER SUPPLY

220–240V, Single-Phase Main Feed

Two hot wires + ground · Custom model, additional fee applies

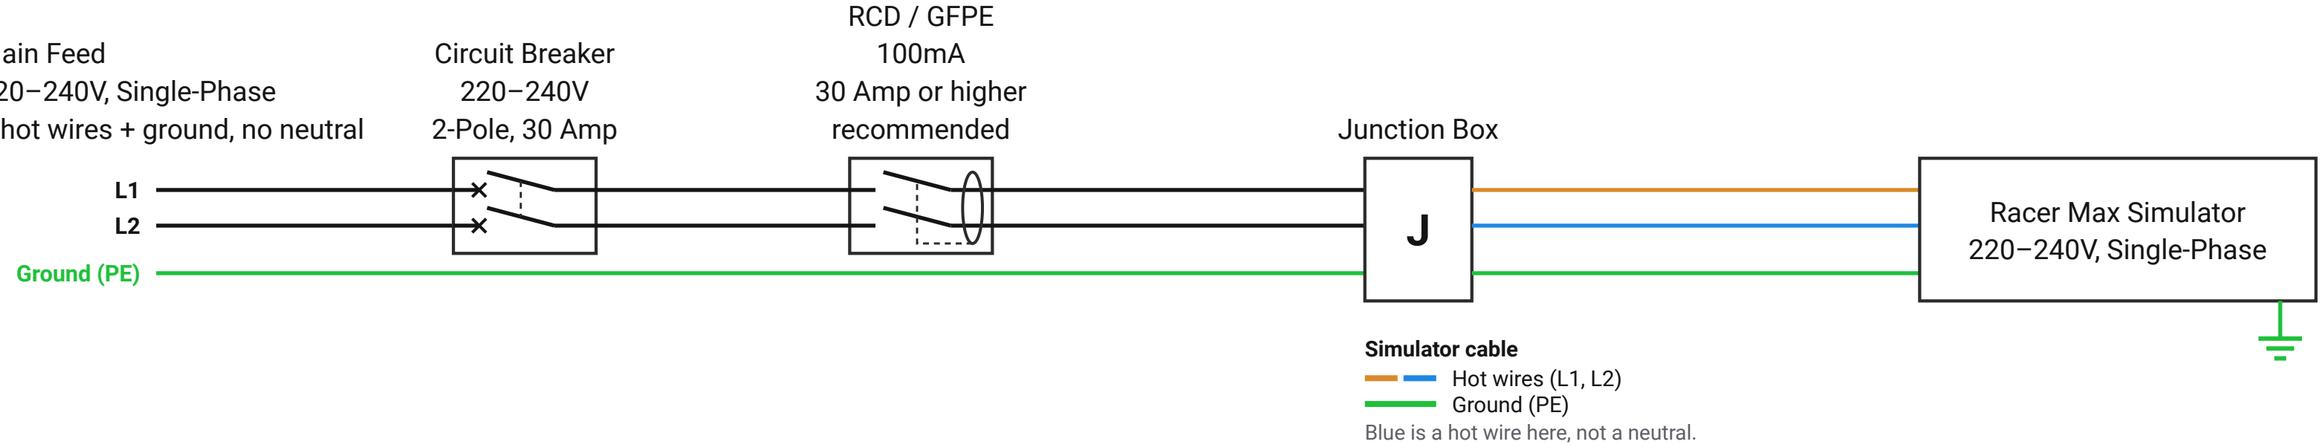

Customer provides

Main Feed, Circuit Breaker, RCD / GFPE and Junction Box

Provided with the simulator

Power cable and simulator

Notes

1. An RCD / GFPE (ground-fault protection of equipment, 100 mA) is recommended, rated 30 A or higher to match the circuit breaker. It is installed in your breaker box and is provided by the customer. Requirements vary by location: check with your licensed electrician and follow your local electrical code.
2. You provide a junction box. Instead of a junction box, a disconnect can be installed, per local code.